

22"-25" Enviroguard™

Ordering Information

ELP - W 0 - 4 I -842T -I

SERIES

ELP - Prismatic Acrylic
ELA - Aluminum

ENCLOSURE

W - Enclosed Wet
E - Enclosed Damp
O - Open Damp
R - Open Wet

SIZE

0-12"
1-16"
2-22"
5-25"

REFLECTOR

1 - White Aluminum
2 - Anodized Aluminum
3 - Soft-Glo Acrylic
4 - Clear Prismatic Acrylic
5 - Custom Finish
6 - Hi-Impact Acrylic

BALLAST COVER TYPE

1 - White Aluminum
2 - Anodized Aluminum
3 - Custom Finish
7 - Non-Stick Finish (Food Processing)

VOLTAGE

1 - 120
2 - 277 D - Dual HID 120/277
3 - 347 M - Multi HID

LAMP WATTAGE & TYPE

22 and 25 INCH
632T - 6 LT 32 watt Triple Tube
832T - 8 LT 32 watt Triple Tube
642T - 6 LT 42 watt Triple Tube
842T - 8 LT 42W Triple Tube*
457Q - 4 LT 57W Quad Tube
470Q - 4 LT 70W Quad Tube*
3120H - 3 LT 120W PLH
250H - 250W H.P.S.
250M - 250W M.H.
250P - 250 Pulse Start M.H.
320P - 320 Pulse Start M.H.
350P - 350 Pulse Start M.H.
400E - 320 to 400 Pulse Start MH with electronic dimming ballast†
400H - 400W H.P.S.
400M - 400W M.H.
400P - 400 Pulse Start M.H.
450P - 450 Pulse Start M.H. (25" only)
300I - 300W incandescent
165QL - 1 LT 165W Induction lamp (277V)*


† Uses remote, 55C listed Advance DynaVision ballast (15' max) at 200-300 volts. Consult factory

Notes:

- All 12", 16" and 22"/25" with hose or NSF option have lens factory installed. Otherwise field installed. See SL option.
- All fixtures listed for 40°C unless noted.


* Fixture has vented ballast cover (available for damp location only). QL units suitable for 30°C.

Dimensions

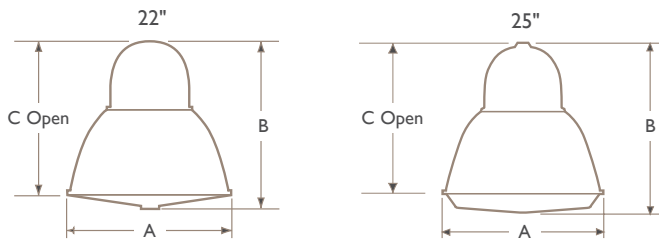

REFL. DIA	DIM. A	DIM. B	DIM. C
22" DIA.	22 1/4"	24"	22"
25" DIA.	25 3/8"	25 3/4"	23"

GN1, GN2



Guth utilized the services of U.L. and ETL for listing products. Specifications and data are subject to change without notice.

JOB	TYPE
CATALOG NUMBER	
LAMP	
NOTES	

Note: HID Lamps - consult manufacturer's data to specify lamp suitable for open or enclosed fixtures. May require special socket — Consult Factory.

Options

Electrical

"/SSF" - Slow Blow Fuse - Fluorescent and HID
"/CKT" - Multi Circuit Switching - consult factory
"/DIM" - Dimming Fluorescent Ballast - consult factory
"/SQ" - Super Quiet Potted HID Ballast

Custom Finishes

Paint - Tiger Drylac Standard - consult factory
Color Anodizing - Consult factory
Reflector Color - (plastic or aluminum) - consult factory
Plating - Consult factory (n.a. on 22" and 25")

Listings

"/NSF" - NSF International Label (with "W" Enclosure)
"/HOSE" - Suitable for Hosedown Label (with "W" Enclosure)

Mountings

"/LHCP-120" - Loop Hanger, 6' White Cord and Molded Plug
"/LHCP-277" - Loop Hanger, 6' White Cord and Twist Lock Plug
"/LH-PT" - Loop Hanger Cord Set with 3' Pigtaills
"/WLP" - 6' Cord, Wet Location Plug and Receptacle
"/CS_" - I.P. Stem with White Swivel Canopy
Specify length 3" to 96" ()
"/WCC" - 6' White Cord and White Canopy (12" damp unit only)
"/BCC" - 6' Black Cord and Black Canopy (12" damp unit only)
"/WCW" - 6' White Curly Cord, steel cable and canopy (damp only)
"/BCW" - 6' Black Curly Cord, steel cable and canopy (damp only)
"/BCA" - 6' Black Cord, 10' aircraft cable and canopy
"/WCA" - 6' White Cord, 10' aircraft cable and canopy

Optics

"/SL" - Lens factory glued w/o clips (22" and 25")

Safety

"/BEF" - 90 min. Fluorescent Battery Back-up Bodine CF-94 (1 LAMP 25°C)
"/BEF-X" - consult factory for increased battery capacities
"/ISL" - Instant Standby Quartz (16", 22" and 25" only)
"/DISL" - Delay Instant Standby Quartz (22" and 25" only)
"/IE" - Emergency Quartz Socket 120V only (16", 22" and 25" only)
"/BRC" - Safety Chain and Hanger
"/WG" - Wire Guard

Mounting Accessories

"/GN1" - 1/2" diameter aluminum Gooseneck - 12"
"/GN2" - 1/2" diameter aluminum Gooseneck - 16" and 22" units only
"/BKT4" - Quad fixture mounting bracket - consult factory
"/BKT2" - Twin fixture mounting bracket - consult factory